


No more Tag lines



Wireless load control
and lifting data collection software.



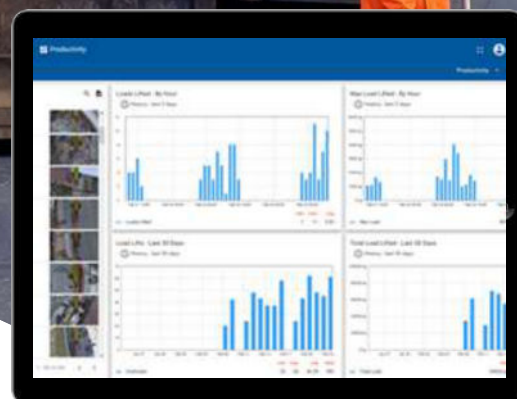

What is Roborigger?

Our technology reduces cost and improves the safety and efficiency of your lifting operations.

Roborigger is a remote-controlled robotic device connected to the end of a crane's wire rope by hook. Our rotational technology controls a load's orientation without the risk of personnel being in the vicinity of the landing zone.

Roborigger rotates and holds loads in a desired orientation regardless of wind, meaning no taglines are needed to manage the spinning or the landing of a load.




The AR15 Roborigger units have a maximum working load of 15 tonne with a maximum weight of 850kg. These units are great for lighter loads in more frequent and consistent lift cycles.



The ARM1500-35 Roborigger units have a maximum working load of 35 tonne with a weight of maximum weight of 1,860kg including lift frame and hook. These units are used for more difficult specific lifts.

Roborigger is also integrated with IoT software that collects lift data in real time and pushes instantly to the cloud based customer platform.

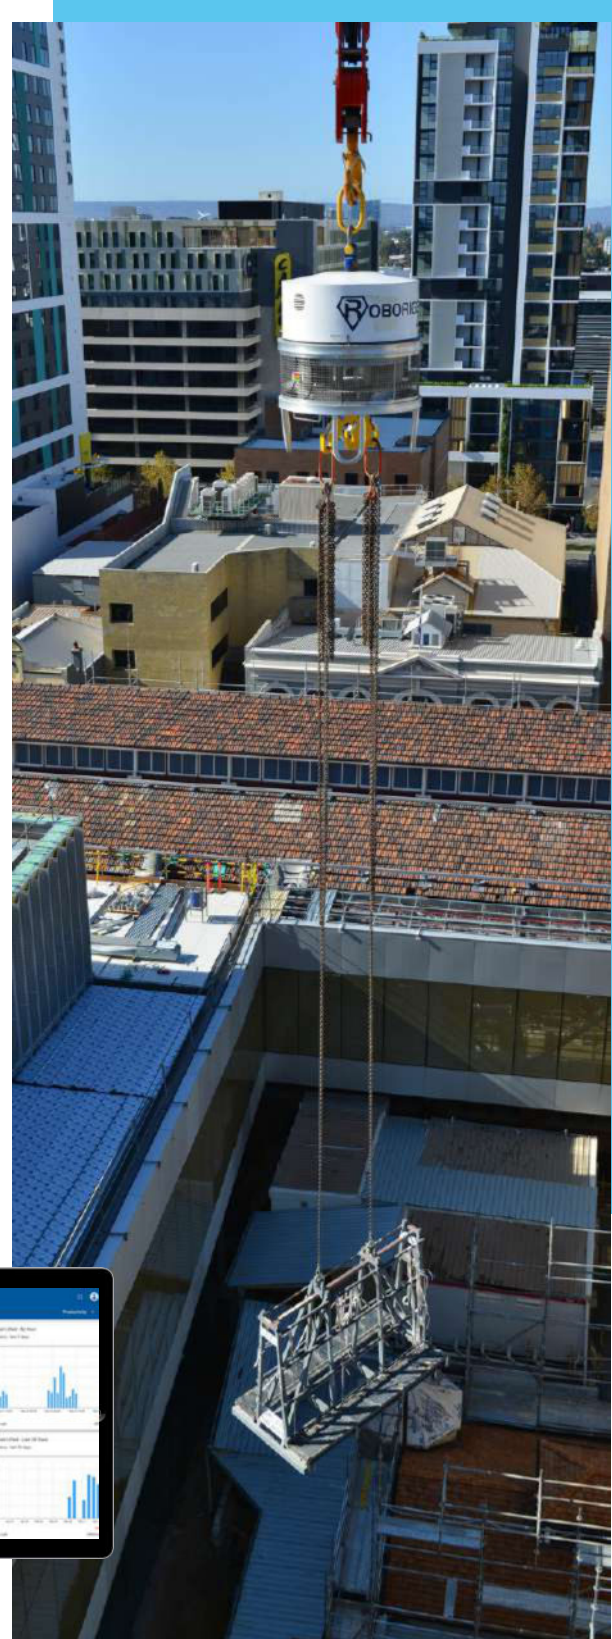



How it Works



Inside Roborigger


Roborigger rotates crane loads using inertial forces. The motor rotates flywheel clockwise. As a result, the frame, hook and the load are rotated anti-clockwise.

The control system has sensors which detect the heading of the load. When the button is pressed, the unit rotates at 10 degrees per second and when the button is released, the orientation of the load is maintained in current position.

Onboard Load Cell

The weight of a load can be viewed on the screen remote control. The weight of every lift is logged and all overloads trigger an overload event which is logged.

The load is checked before the hook is actuated and onboard systems will record the load spectrum (no. of lifts and loads lifted) for use in determining maintenance, retesting, and service life.)

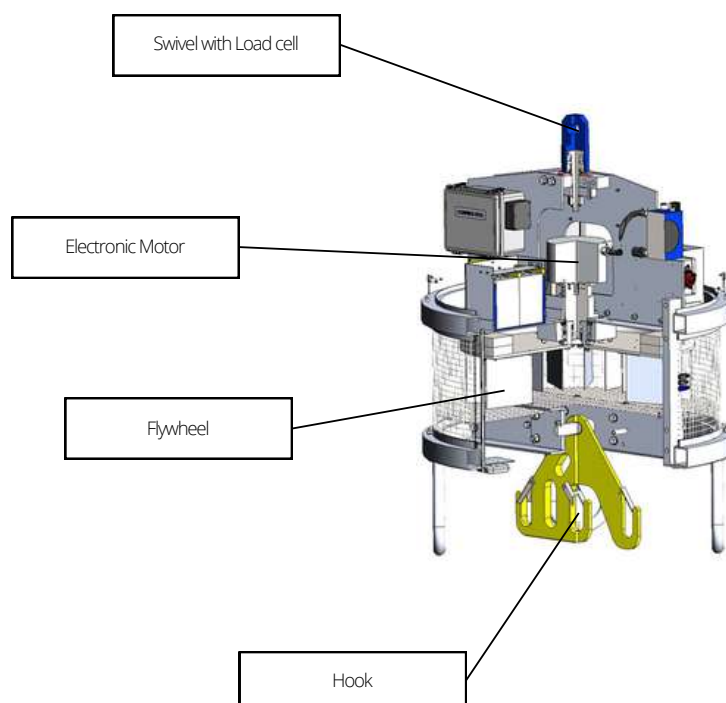

Value of Roborigger

Save up to \$960,000 a year in cost reductions.

How Does Roborigger Help?

Roborigger greatly extends the operating window of lifts by reducing the negative impacts of windage. It also increases speed between lifts by allowing the dogman to orient the load whilst in transit - Ultimately reducing operational down time and increasing the efficiency of lifting cycles.

Improve Lifting Efficiency

The cost of both loading bay crew and crane crew, as well as the hire of the crane, can usually range from \$50,000 to \$75,000 a month. Clients who adopt Roborigger's remote orientation device have seen lifting efficiency **increase by 15%**. Resulting in a **cost reduction of \$7.5k a month**.

Reduce Operational Down time

The loss of operation time due to a crane accident can cost as much as **\$100K**. If a project can avoid one less incident a year, then Roborigger has saved you money.



Accelerate Construction

Large construction projects incur a daily cost of site personnel and equipment between **\$25,000** and **\$100,000** per day, and a project typically lasts between 1 to 2 years (300 to 600 days).

Where logistics and craneage efficiency is improved, projects can accelerate the construction period by **1%** improvement, a saving between **\$75,000** and **\$300,000** per year.

Use Data to Make Improvements

Use Roborigger IoT platform to measure your operational metrics with accuracy and implement changes and improvements. The IoT lifting data can be used to identify pain points and assist in resolution of claims. Historical data can be used for planning future operations. These benefits alone can easily amount to a 1% efficiency improvement. A saving between **\$75,000** and **\$300,000** per year.





Use Cases



**SUMITOMO MITSUI
CONSTRUCTION CO.,LTD.**

Worlds First Autonomous Crane

Sumitomo Mitsui Construction (SMCC) is utilising Roborigger's remote load control technology in the development of the world's first autonomous crane.

The autonomous crane has been successfully tested at the Seiseki Sakuragaoka 33 floor construction site in Tokyo.




MULTIPLEX

Installing Window Panels

Installing window panels under the overhanging awning
Where the crane could not normally reach and tag lines cannot be used.

Roborigger was used in conjunction with counterweight balancer beam. Any orientation of the counter weight balancer beam was controlled by Roborigger via remote.

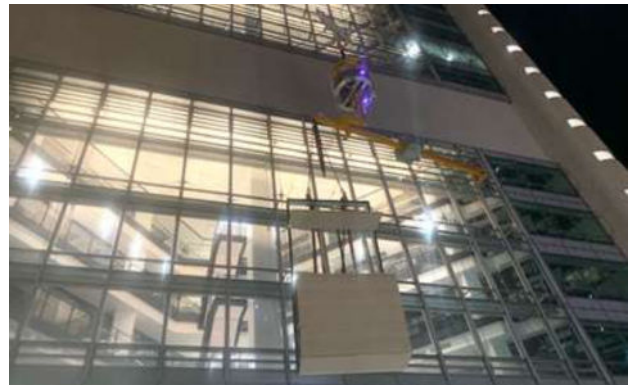


LAING O'ROURKE

Sydney Central Station Steelwork Erection

Riggers were required on the ground beneath load to hold tag lines during installation of the steelwork.

Roborigger eliminated the need for a rigger on the ground to control the load, allowing riggers to be in the elevated work platforms (EWP) ready to install the steelwork.

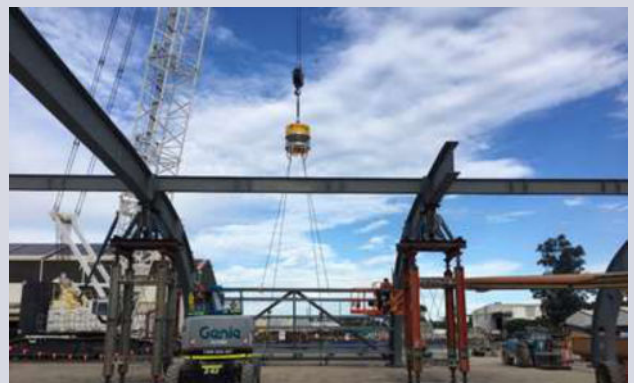

Roborigger AR15



The ROBORIGGER AR15 is a load controlling system with a 15t WLL capacity. Roboriggers add value to your project by increasing lifting efficiency of the crane and its team an average of 15%. This is achieved by allowing orientation to be done whilst the load is in transit, there being no need to attach and remove tag lines, and having the ability to work efficiently at higher wind speeds. Erection of steelwork at height can be done using one or two fewer personnel as you don't need personnel on tag lines to do the orientation. Roborigger has a payback greater than three times its cost.

Using Roborigger allows orienting and landing lifted loads to be undertaken without tag lines and the need for people to be in the vicinity of the load. It also prevents loads from spinning and hitting structure which is a major cause of dropped objects. The safety benefits are significant.

The AR15 has sufficient capacity to control the orientation of a 20ft container in winds of 15kn (27km/hr 8m/sec) gusting to 20kn (36km/hr 10m/sec). The ability to control the load depends on the mass moment of inertia of the load, its windage and shape. If loads are compact and have relatively low windage (e.g. heavy mechanical equipment less than 6m long) the mass can be large and the allowable wind speed can be higher whereas if the loads are very long and have high windage (e.g. a crane boom or wind turbine blade), the allowable mass and wind speed will be less.

Each unit comes with the ability to use 2 remote controls to allow handover between 2 dogmen. This allows the team at street level to connect the load and set its orientation and then hand over to the team at the disconnection end. The load remains under control during the hand over process.

Roboriggers are designed for an ultimate capacity of 5xWLL and are load tested to 2xWLL.

The AR15 includes a trihook that can carry 15t on the centre hook or 15t shared on the outside hooks.


ROBORIGGER includes a video camera and load cell and is fully internet connected by Wi-Fi and 3g/4g so that all lifts are recorded on the internet database complete with date, time, location, weight and a high resolution image. Load ID can also be recorded. This gives the user the ability to track all loads lifted and to analyse performance and productivity.



AR15 unit



Remote control has weight readout

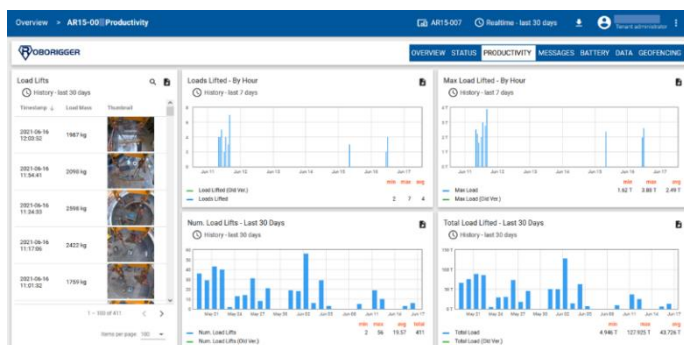

Data is captured and saved to the internet database

KEY FEATURES:

- Integrated load cell
- Integrated IP camera capable of providing video feed and still pictures of load
- 3g/4g modem to provide internet connectivity
- Wi-Fi for transmission of video for use as crane camera or for remote monitoring
- Wireless remote using off the shelf 2.4 GHz or 433MHz crane controller
- 12 hour+ battery pack. Optional 24x7
- Onboard battery charger: input AC240V 10A single phase.
- Remote monitoring using ROBORIGGER IoT website

SPECIFICATIONS: WLL: 15 t

PROOF LOADING: 30 t

Module Size: 1.4 (diam) x 2.03 (height)

Operating temp: 0 to +55C

Weight: 1,050 kg

Design : AS1418 class U3 loading Q3

Fatigue life 100,000 cycles spectrum Kp=1

Design approval - Lloyds Register. CE approved

Roborigger ARM1500-35



The Roborigger ARM1500-35 is a load controlling system based on the ARM1500 load control module fitted with a 35t WLL spreader and hook system. Roboriggers add value to your project by increasing the lifting efficiency of the crane and its team an average of 15%. This is achieved by allowing orientation to be done whilst the load is in transit, there being no need to attach and remove tag lines, and having the ability to work efficiently at higher wind speeds. Erection of steelwork at height can be done using one or two fewer personnel as you don't need personnel on tag lines to do the orientation and the structure can be lifted into its final position under wireless control of the personnel making up the connection. Roborigger has a payback of greater than three times its cost.

Using Roborigger allows orienting and landing lifted loads to be undertaken without tag lines and the need for people to be in the vicinity of the load. It also prevents loads from spinning and hitting structure which is a major cause of dropped objects. The safety benefits are significant.

The ARM1500-35 module has sufficient capacity to control the orientation of a 40ft container in winds of 15kn (27km/hr 8m/sec) gusting to 20kn (36km/hr 10m/sec). The ability to control the load depends on the mass moment of inertia of the load, its windage and shape.

The ARM1500-35 includes a lower support frame which can be left attached when in operation to allow easy set down or it can be removed for operation and the unit can be landed on the frame after use. For 24x7 operation, we include the battery pack in this frame and by using 2 battery pack frames that can be swapped in a few minutes, operations can continue around the clock.


The ARM1500-35 includes a bihook that can carry 35t on one hook or shared on both hooks. It includes our lockable latch to provide peace of mind that the sling will stay on the hook.

ROBORIGGER includes a video camera and load cell and is fully internet connected by Wi-Fi and 3g/4g so that all lifts are recorded on the internet database complete with date, time, location, weight and a high resolution image. Load ID can also be recorded. This gives the user the ability to track all loads lifted and to analyse performance and productivity.


LIFTING CONFIGURATION OPTIONS



With lower frame

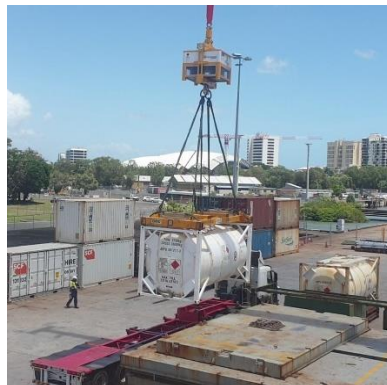

Operation without lower frame

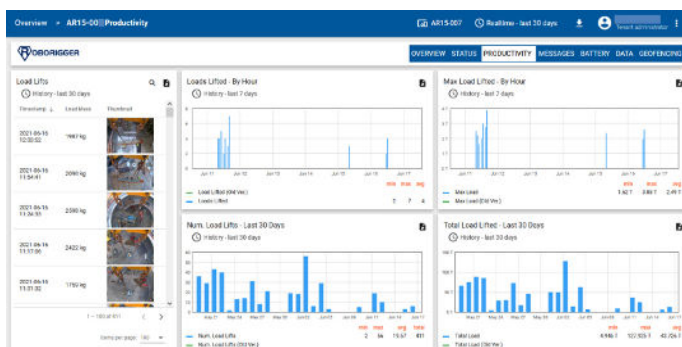

Data is captured and saved to the internet database

KEY FEATURES:

- Integrated load cell
- Integrated IP camera capable of providing video feed and still pictures of load
- 3g/4g modem to provide internet connectivity
- Wi-Fi for transmission of video for use as crane camera or for remote monitoring
- Wireless remote using off the shelf 2.4 GHz or 433MHz crane controller
- 12 hour+ battery pack. Optional 24x7
- Onboard battery charger: input AC240V 15A single phase.
- Remote monitoring using ROBORIGGER IoT website

SPECIFICATIONS:

WLL: 35 t (lift frame capacity)

PROOF LOADING: 65 t

Module Size: 1.57 (W) x 1.76 (W) x 2.15m (H)

Operating temp: 0 to +55C

Weight: module 1,080 kg (without lift frame)

Weight: 2,560 kg including lift frame

AS1418 class U3 loading Q3

Fatigue life 100,000 cycles spectrum Kp=1

Design approval - Lloyds register. CE approved.

Contact Us

HEAD OFFICE - Australia

49 Distinction Rd, Wangara WA 6065
+61 08 9488 4500
info@roborigger.com.au
roborigger.com.au



ROBORIGGER AGENTS

GERMANY/AUSTRIA/SWITZERLAND

Ludwig System GmVH & Co
+49 8651 7656 730
peter.ruf@ludwigsystem.com
ludwigsystem.com

THE NETHERLANDS/BELGIUM

Ludwig System GmVH & Co
+31 615 300 188
edwin.vanZitteran@ludwigsystem.com
ludwigsystem.com

SAUDI ARABIA/QATAR/EMIRATES

Rezayat Sparrow Arabian Crane Hire
+966 550 418 831
raymond.cron@rezayat.net
webtest.rezayat.net/rezayatlogistics

DENMARK

EneliftTM
+45 8651 9000
sales@enelift.com
enelift.com

JAPAN

Joto-Lease Co
+81 356 243 701
si.taniwa@joto-lease.co.jp
joto-lease.co.jp

USA/CANADA

Greenfield Products
+1 708 331 3115
jmeyers@greenfieldpi.com
greenfieldpi.com

Customer Testimonials

MULTIPLEX

"We've also been using [Roborigger] day to day for all our loads. It's really good to having that manoeuvrability to move it exactly which way you want it to go. You can orientate the load so that it doesn't swing out over public space and you can keep it so that it's in line within the boundary of site."

**Lachlan McDonald, Site Engineer,
WA Museum**

SHAWCOR

"Roborigger is in line with our safety initiatives to remove riggers away from the crane while lifting heavy pipes."

**G. Kumar, Regional Engineering
Manager Asia Pacific**



"Roborigger has essentially eliminated the need for a rigger on the ground running after taglines and allows both riggers to be in the elevated work platform (EWP) ready to install."

**Lachlan McMaster, Site
Engineer, Central Station
Metro Project**